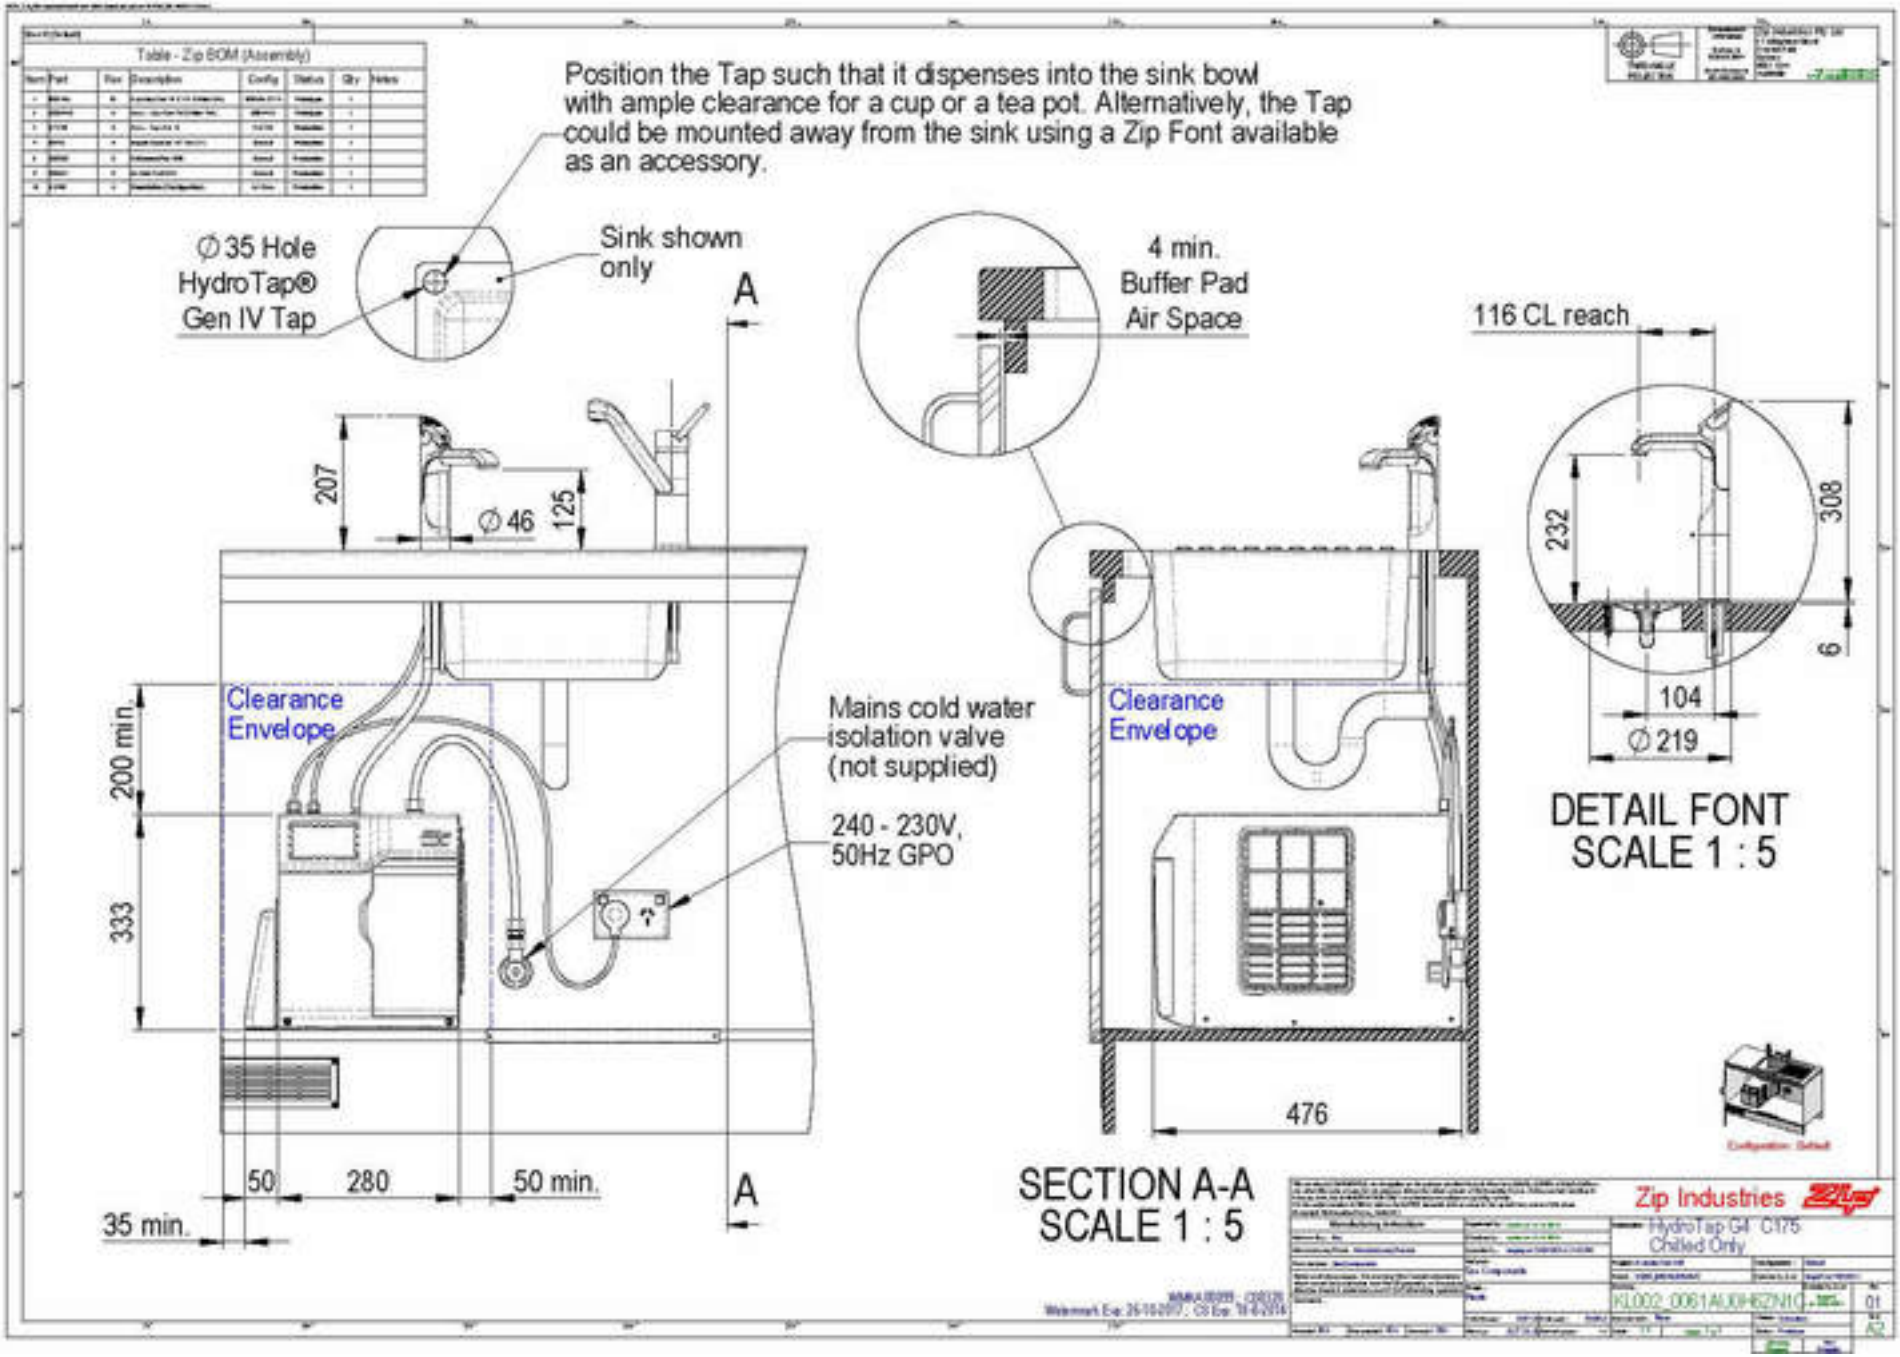
Table - Zip BOM (Assembly)
Position the Tap such that it dispenses into the sink bowl with ample clearance for a cup or a tea pot. Alternatively, the Tap could be mounted away from the sink using a Zip Font available as an accessory.
Ø35 Hole HydroTap® Gen IV Tap
Sink shown only
A
4 min. Buffer Pad Air Space
116 CL reach
207
Ø46
125
232
308
6
104
Ø219
DETAIL FONT
SCALE 1 : 5
Clearance Envelope
200 min.
333
Mains cold water isolation valve (not supplied)
240 - 230V, 50Hz GPO
Clearance Envelope
476
50
280
50 min.
35 min.
A
SECTION A-A
SCALE 1 : 5
Zip Industries
HydroTap G4 C175
Chilled Only
K1002-0061AUXHBZNIC
01
A2